

CHEMICAL MONITORING SYSTEM



CL₂

HYPO

FLUORIDE

W I Z A R D 4 0 0 0



POLYMER

SO₂

FORCE FLOW
FLOQUIP



POWERFUL

MULTI-FUNCTION DISPLAY

NET WEIGHT

CHEMICAL
REMAINING
IN TANK

DAILY USAGE

TOTAL CHEMICAL
USED THE PREVIOUS
DAY

AMOUNT USED

A RUNNING
TOTAL OF
CHEMICAL USED

FEED RATE

CURRENT CHEMICAL
FEED RATE IN LBS.
KGS. OR GALLONS

DAYS TIL EMPTY

DAYS UNTIL EMPTY
AT CURRENT FEED
RATE

TARE WEIGHT

TANK
TARE
WEIGHT

GROSS WEIGHT

TANK TARE WEIGHT
PLUS CHEMICAL
WEIGHT

PERCENT FULL

PERCENT OF TANK
FULL



MULTI-
VESSEL
LEVEL
MONITOR

CHEMICAL
INVENTORY
MANAGER

LEVEL
AND
BATCH
CONTROLLER



INTRODUCING THE NEW WIZARD 4000+, AN EXTREMELY POWERFUL CHEMICAL INVENTORY MANAGEMENT SYSTEM FOR MONITORING CHLORINE AND OTHER CHEMICALS USED IN WATER TREATMENT. THE WIZARD 4000+ HELPS INSURE A SAFE PROCESS AND A SAFE PLANT BY PROVIDING ESSENTIAL INFORMATION SUCH AS CURRENT CHEMICAL FEED RATE, HOW MUCH CHEMICAL HAS BEEN FED, AND HOW MUCH CHEMICAL REMAINS. THE WIZARD 4000+ CAN BE USED WITH ANY OF OUR SCALES AND ULTRASONIC SENSORS, EASILY CONVERTS ANY EXISTING FORCE FLOW HYDRAULIC SCALE TO A DIGITAL MULTI-FUNCTION SYSTEM, AND CAN BE USED WITH MOST ELECTRONIC LOAD CELL BASED WEIGHING SYSTEMS.*

IT'S NOT JUST A SCALE, IT'S AN ENTIRE CHEMICAL INVENTORY MANAGEMENT SYSTEM

MULTI-VESSEL INVENTORY MANAGER:

BECAUSE THE WIZARD 4000+ HAS FOUR SEPARATE CHANNELS, IT CAN BE USED TO SIMULTANEOUSLY MONITOR UP TO FOUR SEPARATE SCALES OR ULTRASONIC SENSORS. THIS MEANS THAT YOU CAN MONITOR EACH TANK (OR BANK OF TANKS) INDEPENDENTLY AS WELL AS GET THE COMBINED TOTALS FOR ALL THE TANKS. THE "DAILY USAGE" FUNCTION ALLOWS FOR EASY RECORD KEEPING AND A "DAYS UNTIL EMPTY" FEATURE MAKES IT SIMPLE TO ANTICIPATE TANK

REFILLING OR CHANGE-OUT AND CHEMICAL REORDER POINTS. VOLUME MONITORING DEVICE

BY ENTERING THE SPECIFIC GRAVITY (DENSITY) OF THE CHEMICAL BEING MONITORED, THE USER CAN SWITCH THE DISPLAY BACK AND FORTH BETWEEN VOLUME AND WEIGHT. A VERY CONVENIENT FEATURE FOR PLANTS THAT PREFER TO MONITOR THEIR CHEMICAL IN GALLONS.

LIQUID LEVEL / PUMP CONTROLLER

THE WIZARD PROVIDES UP TO FOUR SEPARATE SET POINTS, EACH TRIGGERING INTERNAL SOLID-

STATE RELAYS THAT CAN BE USED FOR LOW OR HIGH LEVEL ALARMS, AUTOMATING CHEMICAL TRANSFER OR BASIC CHEMICAL BATCHING.

CHEMICAL FLOW METER


A RATE FUNCTION ALLOWS THE OPERATOR TO MONITOR CHEMICAL FEED RATES IN LBS., KGS., OR GALLONS PER HOUR OR DAY AND CAN BE TRANSMITTED VIA A 4-20MA OUTPUT SIGNAL. IN SOME CASES, THIS TRANSMITTING RATE FUNCTION CAN REPLACE ROTOMETERS AND CALIBRATION DEVICES FOR YOUR FEEDER OR METERING PUMP.

DATALOGGER AND REPORT PRINTING

THE AMOUNT OF CHEMICAL USED FOR EACH OF THE PREVIOUS 10 DAYS IS STORED IN THE WIZARD'S MEMORY. THE DATA CAN BE RECALLED EASILY VIA THE MENU TO VERIFY THE AMOUNT OF CHEMICAL FED AND IS EXCELLENT FOR ASSISTING IN TROUBLESHOOTING PROBLEMS WITH A CHEMICAL FEED SYSTEM. A REPORT PRINTING FUNCTION ALLOWS THE NET WEIGHTS AND FEED RATES FOR EACH CHANNEL TO BE SENT HOURLY, DAILY OR ON DEMAND TO A REMOTE PRINTER VIA THE OPTIONAL RS232 OR RS485 PORT.

* PLEASE CONSULT FACTORY FOR CUSTOM SOFTWARE OR SPECIAL APPLICATIONS.

MULTI-VESSEL INVENTORY CONTROL WIZARD 4000 LIQUID LEVEL & BATCH CONTROL

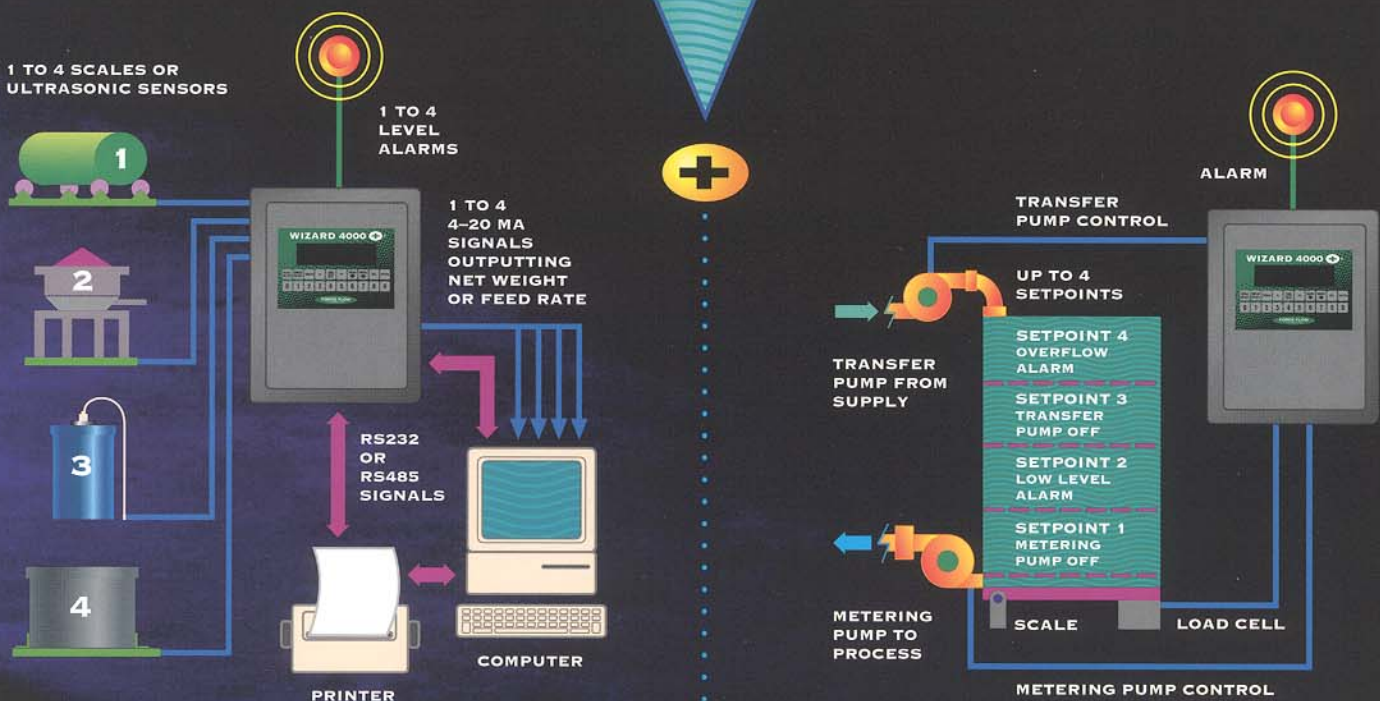



TYPICAL SPECIFICATION FOR CHLORINE AND CHEM FEED SCALES

CHLORINE SCALES ONLY

A QUANTITY OF _____ CHLORINE SCALES SHALL BE PROVIDED AND SHALL BE OF THE DIGITAL READOUT/ELECTRONIC LOAD CELL TYPE. SCALE FRAME SHALL BE EPOXY FINISHED AND SIZED TO ACCEPT _____ (1 TO 6) 2000 LB. CONTAINERS. SCALE SHALL HAVE HEAVY-DUTY BRONZE BUSHED BEARING TRUNNIONS INSTALLED FOR EACH CONTAINER TO ALLOW EASY CONTAINER ROTATION. SCALE SIZE SHALL BE WITHIN THE DIMENSIONS OF THE TANK(S) IT SUPPORTS.

CHEM FEED SCALES ONLY

A QUANTITY OF _____ CHEMICAL SCALES OF _____ LBS. CAPACITY SHALL BE PROVIDED AND SHALL BE OF THE DIGITAL READOUT/ELECTRONIC LOAD CELL TYPE. SCALE PLATFORM SHALL HAVE A FUSION BONDED EPOXY POWDER COATED FINISH. PLATFORM SHALL BE SIZED TO ACCEPT A _____ INCH DIAMETER TANK. FOUR (4) ADJUSTABLE HOLD-DOWN CLIPS SHALL BE PROVIDED ON THE PLATFORM FOR TANK RESTRAINT.

SCALE SHALL BE OF THE SINGLE LOAD CELL DESIGN. WEIGHT SHALL BE TRANSFERRED VIA LEVER(S) TO A SINGLE, NTEP APPROVED LOAD CELL OF THE SHEAR BEAM, STRAIN GAUGE TYPE. FLEXIBLE CABLE SHALL CONNECT LOAD CELL TO INDICATOR TO ALLOW EASY REMOTE INSTALLATION OF THE READOUT. CABLE LENGTH SHALL BE _____ (20 FT. STANDARD).

INDICATOR SHALL CARRY CE MARKING AND SHALL BE HOUSED IN A NEMA 4X, UL APPROVED ENCLOSURE. INDICATOR SHALL INDEPENDENTLY MONITOR _____ (UP TO 4) SCALES. DIGITAL DISPLAY SHALL BE A 2 LINE, 16 CHARACTERS PER LINE, BACKLIT ALPHANUMERIC LCD TYPE. INDICATOR SHALL BE EQUIPPED WITH A 10-KEY NUMERIC PAD WITH TACTILE FEEDBACK FOR EASY INPUT OF TARE AND LEVEL ALARM VALUES.



ALL INDICATOR OPERATIONS SHALL BE MENU PROMPTED FOR EASE OF OPERATION. OPERATOR SHALL BE ABLE TO MONITOR CHEMICAL BY WEIGHT, VOLUME OR PERCENT FULL. AN AUTO LOAD FUNCTION SHALL AUTOMATICALLY COMPENSATE FOR TANK TARE WEIGHT DURING TANK CHANGE. EACH CHANNEL SHALL HAVE A USER SELECTABLE, TWO DIGIT SCALE ID NUMBER AND SHALL DISPLAY NET REMAINING, FEED RATE, DAILY USAGE, TOTAL AMOUNT USED, DAYS UNTIL EMPTY, GROSS WEIGHT, AND TARE WEIGHT. A DATA LOG FUNCTION SHALL STORE THE DAILY USAGE FOR EACH OF THE PREVIOUS 10 DAYS.

FULL SCALE ACCURACY SHALL BE BETTER THAN 1/4 OF 1%. SCALE SHALL BE *MODEL NO. _____ AND DIGITAL DISPLAY SHALL BE WIZARD 4000 ELECTRONIC INDICATOR MANUFACTURED BY FORCE FLOW EQUIPMENT, 1150-D BURNETT AVE., CONCORD, CA 94520 USA OR EQUAL.

OPTIONAL

EACH CHANNEL (SCALE) SHALL HAVE AN INDEPENDENT, ADJUSTABLE 4-20MA OUTPUT SIGNAL (NET WEIGHT OR FEED RATE). EACH INDICATOR SHALL HAVE _____ (UP TO 4) ADJUSTABLE SET POINTS FOR ALARMS OR LIQUID LEVEL CONTROL. A REPORT PRINTING FUNCTION SHALL SEND DATA WITH A TIME AND DATE STAMP VIA A RS232 OR RS485 PORT TO A REMOTE PRINTER.

*PLEASE SEE INDIVIDUAL SCALE BULLETINS FOR MODEL NUMBERS AND DIMENSIONAL INFORMATION. ALL SPECIFICATIONS AND DRAWINGS ARE AVAILABLE IN ELECTRONIC FORMAT.

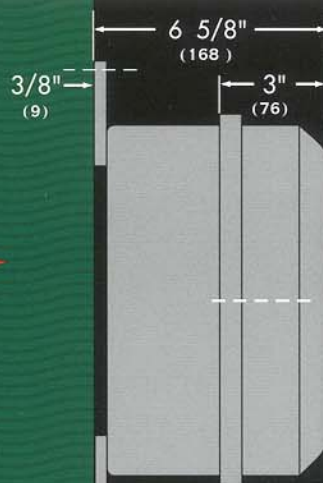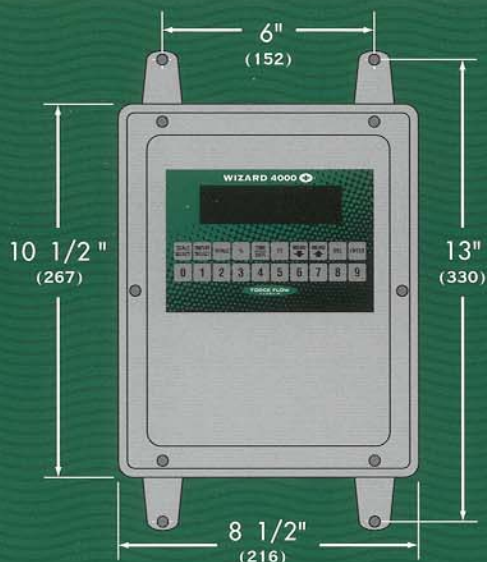

DIMENSIONS: INCHES (MILLIMETERS)

SPECIFICATIONS

- CHANNELS:** 1 TO 4 INDEPENDENT WEIGHING CHANNELS WITH INDEPENDENT INPUT/OUTPUT CONTROLS.
- INPUTS:** 1 TO 4 ELECTRONIC LOAD CELLS ON EACH CHANNEL OR UP TO 4 ECHO-SCALE ULTRASONIC LEVEL SENSORS.
- INCREMENTS:** 1, 2, 5, 10, 20, 50.
- DISPLAY UNITS & RANGE:** LBS, KGS, AND GALLONS UP TO 99,999.
- RESOLUTION:** 1000, 2000, 3000, 4000, 5000, 6000, 8000, 12000.
- DISPLAY:** 2 LINES, 16 CHARACTERS PER LINE, ALPHANUMERIC LCD DISPLAY WITH BACKLIGHTING, .4" CHARACTERS.
- KEYBOARD:** 10 FUNCTION KEYS, 10 NUMERIC KEYS, WITH TACTILE FEEDBACK.
- OPERATING TEMPERATURE:** 32 TO 122 DEG. F (0-50 DEG. C).
- POWER:** 110, 220, OR 240 VAC, 50/60 HZ, 5 WATTS.
- CONNECTORS:** POWER AND INPUT/OUTPUTS - 1/2" NYLON CONDUIT CONNECTOR
LOAD CELLS - 1/2" NYLON CORD CONNECTOR.
- ENCLOSURE:** NEMA 4X, UL LISTED STRUCTURAL FOAM MOLDED ENCLOSURE.
- PERFORMANCE:** OVERALL SYSTEM ACCURACY: 0.1 TO 0.25% F.S.
NON-LINEARITY: <0.03% F.S. HYSTERESIS: <0.02% F.S. NON-REPEATABILITY: <0.01% F.S.
THERMAL STABILITY: <0.002%/DEG. F, ZERO AND SPAN.

OPTIONS

- 4-20 MA OUTPUT SIGNALS:**
1 TO 4 SEPARATE OUTPUT SIGNALS, NET WEIGHT OR FEED RATE, 1000 OHMS MAX PER OUTPUT.
- LEVEL ALARMS / SET POINTS:**
A MAXIMUM OF 4 SET POINTS ON UP TO 4 CHANNELS (1 ON EACH CHANNEL OR 4 ON 1 CHANNEL). SOLID STATE OR DRY CONTACT RELAYS, N.O./N.C., LATCHING/NON-LATCHING, 5 AMPS MAX.
- COMMUNICATIONS:**
RS232 SERIAL PORT OR RS485 SERIAL NETWORK PORT.

* PLEASE SEE INDIVIDUAL SCALE BULLETINS FOR MODEL NUMBERS AND DIMENSIONAL INFORMATION. ALL SPECIFICATIONS ARE AVAILABLE IN ELECTRONIC FORMAT.

1150-D BURNETT AVE., CONCORD, CA 94520 USA
925.686.6700 FAX: 925.686.6713
E-MAIL: INFO@FORCEFLOW.COM
WWW.FORCEFLOW.COM

